



Lithium Coin Cell - CR2430

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant Pb free



REACH compliant




Conflict mineral free

Technical Data Sheet · CR 2430

SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	245786
Nominal Capacity	320 mAh
Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Continuous Current	4 mA
Max. Pulse Current	18 mA
Operating Temperature	-30°C to +85°C*
Weight	Approx. 4g
Chemistry	Li/MnO ₂

DIMENSIONS (mm)

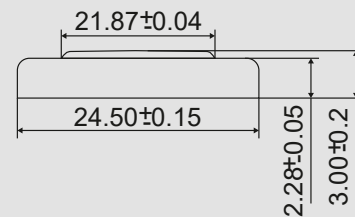


* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DISCHARGE CHARACTERISTICS

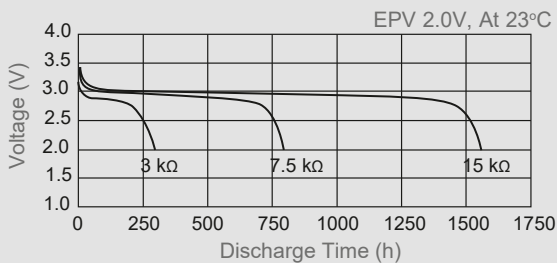


TEMPERATURE CHARACTERISTICS

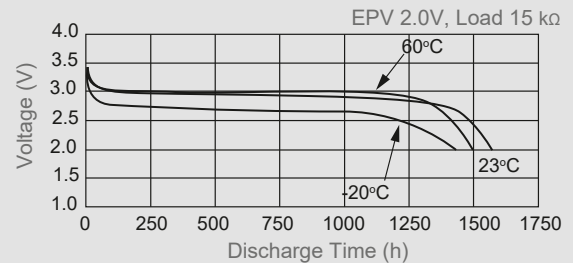

PULSE DISCHARGE CHARACTERISTICS

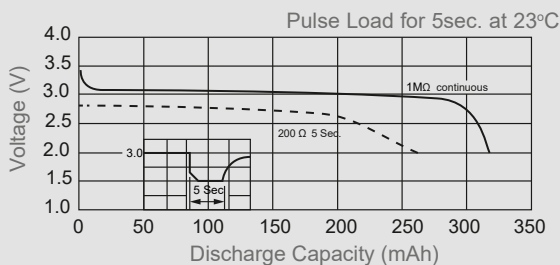

LOAD VS: CAPACITY

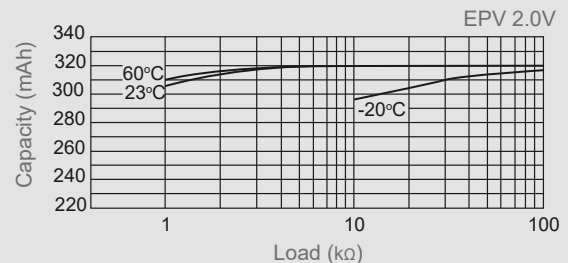

Available Terminals and Wire Connectors:
 please contact Jauch for diagram of batteries with
 terminals

batterytechnology@jauch.com