


Features


- High temperature
- RoHS compliant
- Consumer electronic
- Portable power tools
- DC-DC converters



Items	Characteristics					
Rated Voltage	2.7V					
Operating Temperature Range	-40~+85°C					
Surge Voltage	2.85V					
Capacitance Range	1~50F					
Capacitance Tolerance (25°C)	-10~+30%					
Temperature Characteristics	The specifications shall be met at category temperature range from -40°C to 85°C	<table border="1"> <tr> <td>Capacitance range</td><td>Within 30% of the specified value at 25°C</td></tr> <tr> <td>ESR</td><td>Less than 4 times of the initial specified value</td></tr> </table>	Capacitance range	Within 30% of the specified value at 25°C	ESR	Less than 4 times of the initial specified value
Capacitance range	Within 30% of the specified value at 25°C					
ESR	Less than 4 times of the initial specified value					
High Temperature Loaded	The specifications shall be met after rated voltage applied at 85°C for 1000 hours	<table border="1"> <tr> <td>Capacitance range</td><td>Within 30% of the specified value</td></tr> <tr> <td>ESR</td><td>Less than 4 times of the initial specified value</td></tr> </table>	Capacitance range	Within 30% of the specified value	ESR	Less than 4 times of the initial specified value
Capacitance range	Within 30% of the specified value					
ESR	Less than 4 times of the initial specified value					
High Temperature Storage	The specifications shall be met after storage at 85°C for 1000 hours	<table border="1"> <tr> <td>Capacitance range</td><td>Within 30% of the specified value</td></tr> <tr> <td>ESR</td><td>Less than 4 times of the initial specified value</td></tr> </table>	Capacitance range	Within 30% of the specified value	ESR	Less than 4 times of the initial specified value
Capacitance range	Within 30% of the specified value					
ESR	Less than 4 times of the initial specified value					
Cycle Life	The specifications shall be met after 500,000 cycles at 25°C, cycle of charge/discharge from V_R to $1/2V_R$	<table border="1"> <tr> <td>Capacitance range</td><td>Within 30% of the specified value</td></tr> <tr> <td>ESR</td><td>Less than 4 times of the initial specified value</td></tr> </table>	Capacitance range	Within 30% of the specified value	ESR	Less than 4 times of the initial specified value
Capacitance range	Within 30% of the specified value					
ESR	Less than 4 times of the initial specified value					

Dimensions

mm

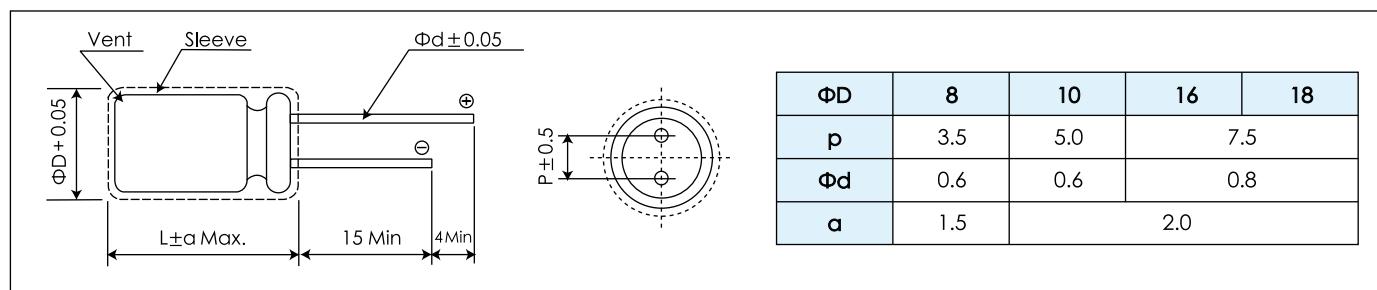

Standard Ratings for SRQ Series

U _R (Surge Voltage) Code	Rated Cap. 25°C	Impedance		Leakage Current (72hrs)	Size ΦD×L	Weight (g)	P/N
		ESR _{DC}	ESR _{AC} 1KHz				
(V)	(F)	(mΩ)	(mΩ)	(mA)	(mm)	(g)	-
2.7 (2.85) 2R7	1	400	260	0.010	8 x 14	0.8	SCCDQR2R7105QRH080014E
	2	250	130	0.012	8 x 14	1	SCCDQR2R7205QRH080014E
	3	150	80	0.014	8 x 20	1.4	SCCDQR2R7305QRH080020E
	5	130	70	0.018	10 x 20	2.1	SCCDQR2R7505QRH100020E
	7	80	55	0.025	10 x 25	2.3	SCCDQR2R7705QRH100025E
	10	60	40	0.040	10 x 30	3.2	SCCDQR2R7106QRH100030E
	25	35	25	0.080	16 x 25	7	SCCDQR2R7256QRH160025E
	50	22	15	0.150	18 x 40	12.8	SCCDQR2R7506QRH180040E