



Lithium Primary - CR-P2

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free



REACH compliant




Conflict mineral free

SPECIFICATIONS

Jauch part number	251097
Nominal Voltage	6V
Nominal Capacity	1600 mAh
Cut-Off Voltage	4V
Continuous Standard Load	1 mA
Max. Continuous Current	1000 mA
Max. Pulse Current	3000 mA
Operating Temperature	-40°C to +70°C *
Weight	Approx. 36.9 g
Chemistry	Li/MnO ₂


Note: Capacity 1600mAh is obtained at standard cc load to 4.0V at 23°C.

DIMENSIONS [mm]

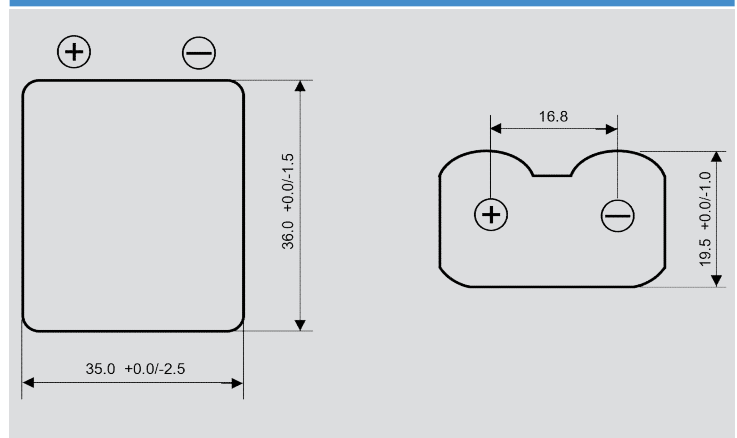


* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DISCHARGE CHARACTERISTICS

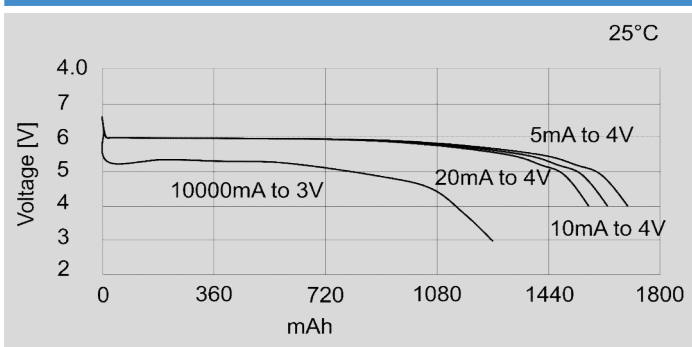

TEMPERATURE CHARACTERISTICS

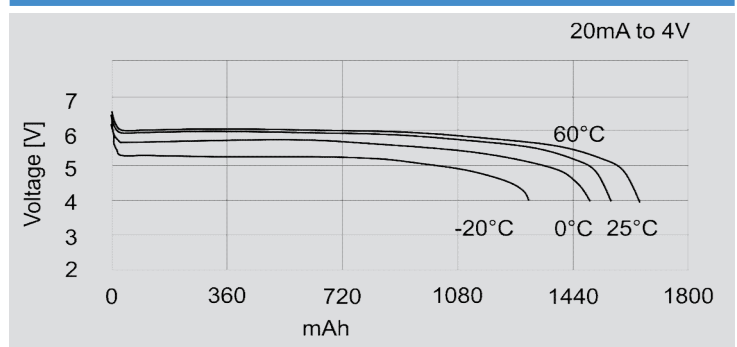

DISCHARGE CHARACTERISTICS

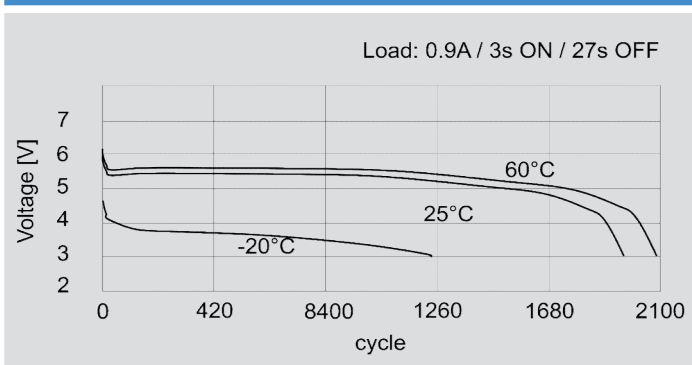

LOAD VS: CAPACITY

