



Lithium Coin Cell - CR 2032 HT

- Designed for High Temperature Environment
- Especially for automotive devices such as TPMS or ETC
- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available



RoHS compliant



Pb free




REACH compliant



Conflict mineral free

SPECIFICATIONS	
Jauch part number	251845
Nominal Voltage	3V
Nominal Capacity	200 mAh
Continuous Standard Load	15 kΩ
Standard Current	0.2 mA
Max. Pulse Current	15 mA
Operating Temperature	-40°C to +125°C
Weight	Approx. 3.1 g
Chemistry	Li/MnO ₂

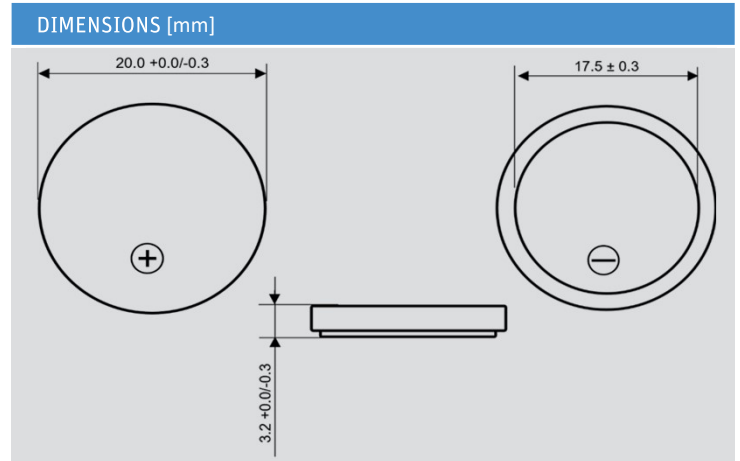

Note: Capacity 200mAh is obtained at standard cc load to 2.0V at 23°C.

